


1. Part Number: 675 A45610040

2. Photo:

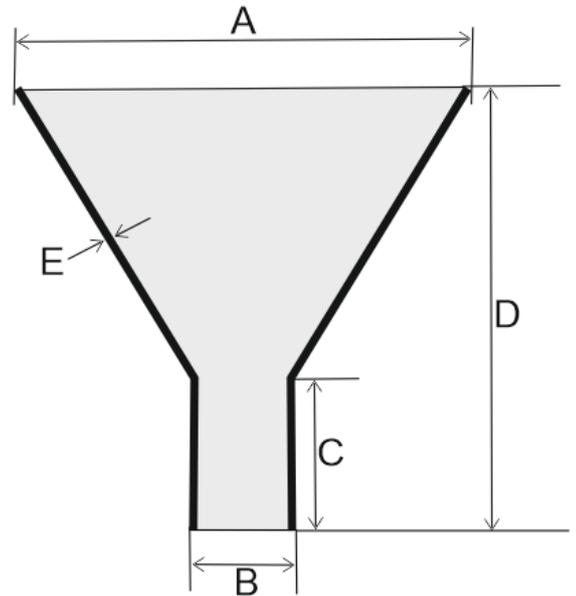

3. Product Information:

Description	Funnel 100mm top diameter, 40 mm spout diameter										
Use	Suitable for low viscosity liquids										
Material of Construction:	316L stainless steel										
Method of Construction:	Crevice free all welds ground and polished										
Surface Finish:	Better than 0.5 microns Ra										
Dimensions	<table border="0"> <tr> <td>A - Top Diameter</td> <td>100mm</td> </tr> <tr> <td>B - Diameter of Spout</td> <td>40mm</td> </tr> <tr> <td>C - Length of Spout</td> <td>35mm</td> </tr> <tr> <td>D - Overall Height</td> <td>88mm</td> </tr> <tr> <td>E - Wall Thickness</td> <td>1.5mm</td> </tr> </table>	A - Top Diameter	100mm	B - Diameter of Spout	40mm	C - Length of Spout	35mm	D - Overall Height	88mm	E - Wall Thickness	1.5mm
A - Top Diameter	100mm										
B - Diameter of Spout	40mm										
C - Length of Spout	35mm										
D - Overall Height	88mm										
E - Wall Thickness	1.5mm										
Internal Angle:	60°										
Nominal Weight:	160g										
BSE/TSE statement:	All polishing compounds used in the manufacture of this product are of vegetable origin										
Recommended Storage Conditions:	Dry and ambient temperature										
Note: This product should be thoroughly cleaned before it is used for the first time											

4. Approval:

Signed:

Name: Kuldeep Flora
Position: Quality Manager
Date: 10-Nov-25